




# SINUO DOOR

Irreversible electromechanical gear motor with jointed arm for gates with folding doors. External fitting.

Code	Leaf	Motor	Description	Pcs. / Pallet
SIN DOOR	1.5 m	230V AC	Irreversible gear motor (complete with arm). Model with limit switch for opening and closing. Control unit not fitted on board.	30

Irreversible electromechanical gear motor for folding doors.

dimensions

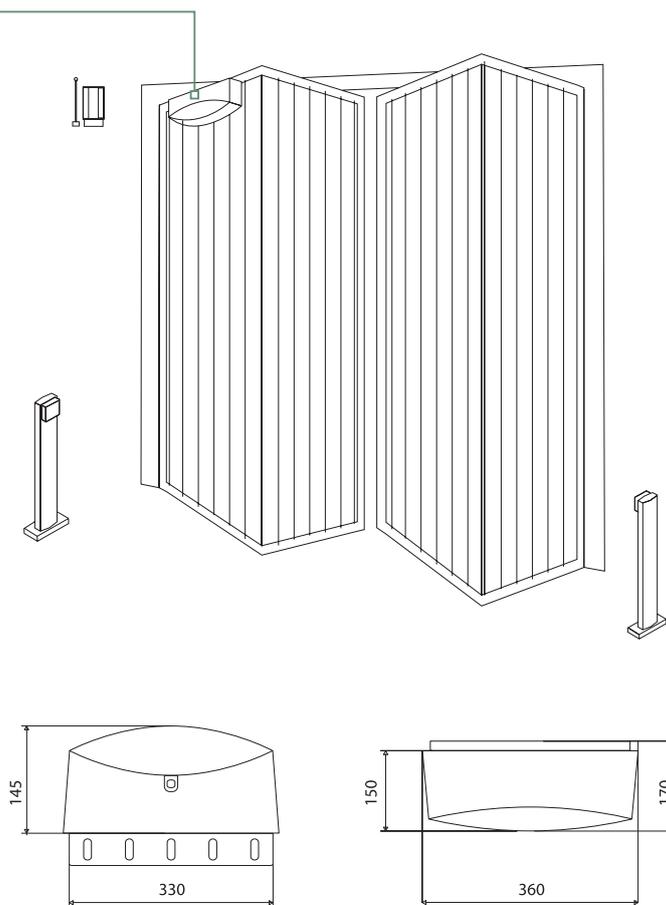

# SINUO DOOR


## Technical specifications



	SINUO DOOR
Max. gate leaf weight (Kg) - see drawing	250
Max. gate leaf length (m) - see drawing	1.5
Motor power supply (V)	230V 50 Hz
Power absorbed (W)	220
Torque (Nm)	350
Operating T° (°C Min/Max)	-20 +70
Protection class (IP)	44
Work intermittence (%)	30
Speed (rpm)	1.7
Overheating protection (°C)	140

### Limit on use

#### SINUO DOOR



**NB.** In windy areas or when the gate has a particular structural shape, we advise reducing the limits on use and installing an electric lock.

#### ASEC SIN



Internal release with 6 m wire (1 Pc./Pack)

#### ASEC XL



External releasing device with 6 m metal wire (1 Pc./Pack)

#### DOS



Key switch with release mechanism for metal wire (1 Pc./Pack)

#### GE UNI RS DL



1 Control unit with built-in receiver

#### GE UNI R



Control unit with built-in receiver and limit switch

#### SDBR1



Curved arm kit

#### SDBR2



Reinforced telescopic arm kit

#### TL

- Page 116



Sign plate